

## Quality H12-821\_V1.0-ENU PDF Dumps - H12-821\_V1.0-ENU Exam Questions [Q387-Q404]



Quality H12-821\_V1.0-ENU PDF Dumps - H12-821\_V1.0-ENU Exam Questions  
Most UptoDate Huawei H12-821\_V1.0-ENU Exam Dumps PDF 2024

**Q387.** The command to configure the VRRP preemption delay is:

- \* vrrp vrid 1 preempt-mode timer delay 20
- \* vrrp vrid 1 timer delay 20
- \* vrrp vrid 1 preempt-timer 20
- \* vrrp vrid 1 preempt-delay 20

**Q388.** Which of the following descriptions about the characteristics of routing policies is wrong?

- \* It can save system resources by controlling the size of the routing table of the router
- \* By modifying routing attributes, network data traffic can be reasonably planned to improve network performance
- \* Can modify routing attributes, but cannot change the path through which network traffic passes
- \* It can improve the security of the network by controlling the receiving, publishing and importing of routes

**Q389.** Regarding BGP MED, which of the following descriptions are correct? (Multiple choice)

- \* The default value of BGP route MED is 0

- \* By default, BGP routing rules can compare the distance between routes from different autonomous systems.
- \* By default, if the MED value is not set in the route attribute, press the process. If the bestroute med-none-as maximum command is configured. Then handle the maximum MED value of 4294967295
- \* In BGP routing rules, the priority of MED is lower than AS-Path, Preferred-Value, Local-Preference, Origin

**Q390.** Router-LSA can describe different link types. Which of the following does not belong to the Router LSA link type?

- \* Link Type can be used to describe the connection to the untapped network, namely SubNet
- \* Link Type can be used to describe the connection to the transit network, namely TranNet
- \* Link Type can be used to describe a point-to-point connection to another router, ie p2p
- \* Link Type can be used to describe the virtual connection, that is, VlinkE and Link Type can be used to describe the point-to-multipoint connection to another router group, that is, p2mp

**Q391.** Which of the following circumstances will a router running IS-IS not generate an LSP?

- \* Modify the IP address of the IS-IS interface
- \* Change the sysname of the router
- \* IS-IS neighbor UP or Downm
- \* Modify the Cost value of the IS-IS interface

**Q392.** Which of the following tools cannot be directly referenced by the apply clause of a route-policy?

- \* IP-Prefix
- \* tag
- \* community
- \* origin

**Q393.** Which of the following statements about DHCP Server spoofer attacks are correct? (Multiple choice)

- \* DHCP Server counterfeiter attack sends wrong IP address and network parameters to the terminal by counterfeiting the DHCP server, causing users to be unable to access the Internet
- \* After the DHCP snooping function is enabled on the Huawei switch interface, the interface is in the trusted state by default.
- \* Using the DHCP nooping function on the Huawei layer 2 access switch and enabling the trusted interface can effectively ensure that the client obtains the IP address and network parameters from the legal DHCP Server
- \* A DHCP fake server can affect multiple terminals in different broadcast domains and cannot obtain correct IP addresses and network parameters

**Q394.** As a network administrator, which of the following protocols can be used for network device configuration? (Multiple choice)

- \* LLDP
- \* SNMP
- \* NETCONF
- \* SSH

**Q395.** Which of the following descriptions about the basic concepts of VRRP are wrong? (Multiple choice)

- \* A virtual router can only have one IP address, which is configured by the user
- \* VRRP uses VRID to identify virtual routers
- \* The VRP backup group can consist of one Master device and multiple Master devices, and is regarded as the default gateway of hosts in a shared LAN
- \* A VRRP router may belong to one or more virtual routers

**Q396.** Which of the following description of IBGP neighbors and EBGP neighbors is wrong?

- \* If the two exchange BGP packets peers belong to different autonomous systems, then the two peers are EBGP peer
- \* If the two exchange BGP packets peers belong to the same autonomous system, then the two peers are IBGP peer

- \* IBGP peers must be physically directly connected
- \* Two routers running BGP must have IP connectivity to establish a TCP session

**Q397.** In the WLAN network, enable the HSB backup group. If the AP has been online on the main AC, and then add AP information offline on the standby AC, the AP status on the standby AC will be displayed as fault. In this case, you need to execute the `undo hsb enable` command in the HSB backup group view of the standby AC to disable the HSB active/standby backup function, and then execute the `hsb enable` command to enable the HSB active/standby backup function. At this time, the information on the active AC will be backed up to Standby AC, to achieve consistent backup of active and standby information, and the status of the AP on the AC will be displayed as standby.


- \* True
- \* False

**Q398.** Which of the following descriptions about configuring the `set-overload` command in IS-IS is correct?

- \* This command is used to enable IS-IS to automatically calculate the interface cost according to the bandwidth
- \* This command is used to set the overload flag bit of non-pseudo-node LSP
- \* This command allows the device to set the time for the system to maintain the overload flag according to the state of BGP convergence
- \* This command is used to specify that the Hello message sent after the device restarts carries the SA bit

**Q399.** Please match the name of the BGP recognized community attribute with its function.

<u>No Advertise</u>	After the device receives a route with this attribute, it will not send the route to any BGP peer
<u>No Export</u>	After the device receives a route with this attribute, it will not send the route map outside AS
Internet	As a backup of the designated port, it provides another backup path from the root bridge to the corresponding network segment
<u>No Export Subconfed</u>	After the device receives a route with this attribute, it will not advertise this route to other sub-ASs in the AS

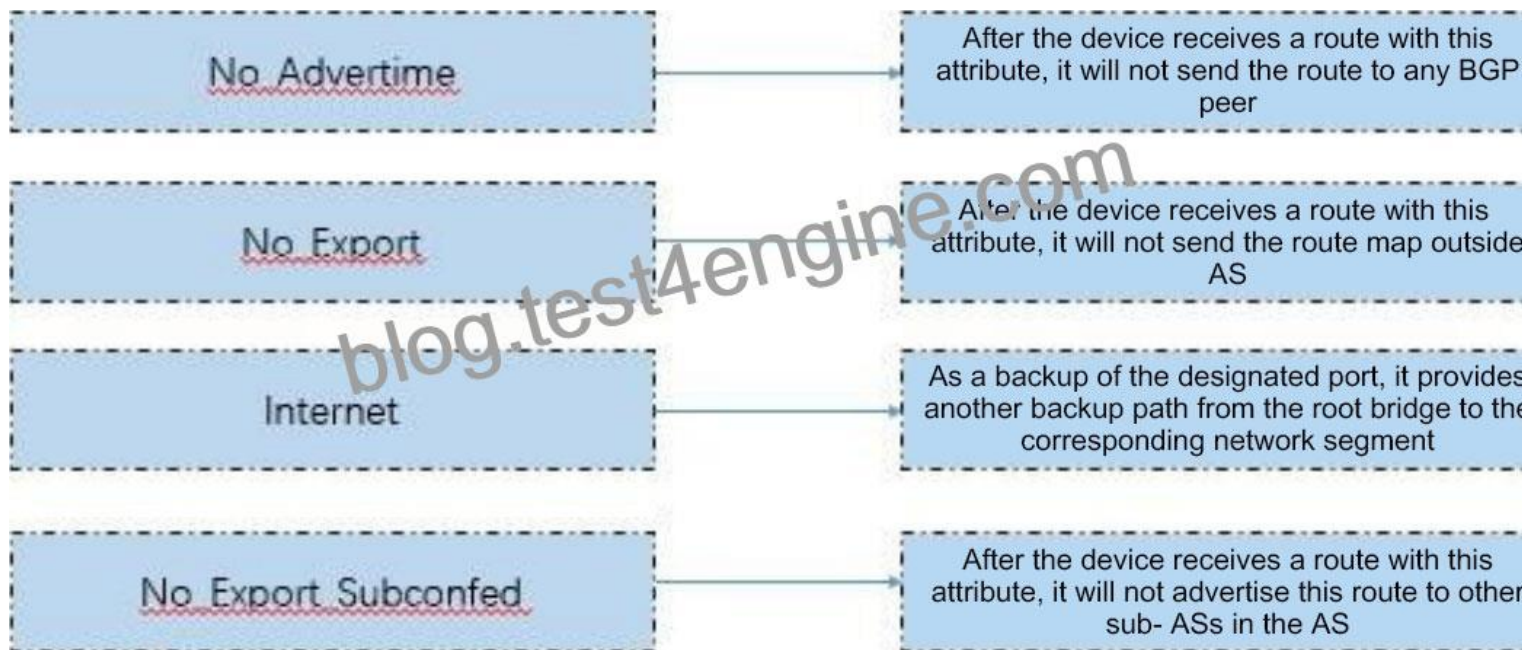

**Q400.** IGMP SSMM APPING does not process IGMPv3 report messages. To ensure that hosts running any version of IGMP on the same network segment can obtain SSM services, it is necessary to run IGMPv3 on the interface of the multicast router connected to the network segment where the member hosts are located.

- \* TRUE
- \* FALSE

**Q401.** Which of the following options is the minimum total length of the NET address in IS-IS?

- \* 8 bytes
- \* 16 bytes
- \* 2 bytes
- \* 20 bytes

**Q402.** BGP selects the route with the best value of the Origin attribute. The value of the Origin attribute is:

EGP, IGP, ()  
incomplete

**Q403.** Which of the following statements about the BFD detection mode is correct? (Multiple choice)

- \* Asynchronous mode is a commonly used BFD detection mode
- \* In query mode, once a BFD session is established, the system will no longer periodically send BFD control packets
- \* Asynchronous detection mode does not support echo function
- \* In asynchronous mode, the systems will send BFD control packets at the negotiated cycle. If a system does not receive the BFD control packets from the peer within the detection time, it will declare the status of the BFD session Down.

**Q404.** The correct description about LSA is?

- \* The combination of LS type, LS sequence number and Advertising Router together identifies an LSA
- \* The combination of LS type, Link State ID and Advertising Router jointly identifies an LSA
- \* The combination of LS type, Link State ID and LS sequence number jointly identifies an LSA
- \* The combination of LS sequence number, Link State ID and Advertising Router jointly identifies an LSA

**100% Free HCIP-Datacom H12-821\_V1.0-ENU Dumps PDF Demo Cert Guide Cover:**  
[https://www.test4engine.com/H12-821\\_V1.0-ENU\\_exam-latest-braindumps.html](https://www.test4engine.com/H12-821_V1.0-ENU_exam-latest-braindumps.html)